


Grizzly Industrial, Inc.®

ACOUSTIC GUITAR AMPLIFIER MODEL H6016 INSTRUCTION SHEET



COPYRIGHT © MARCH, 2004 BY GRIZZLY INDUSTRIAL, INC.
WARNING: NO PORTION OF THIS MANUAL MAY BE REPRODUCED IN ANY SHAPE
OR FORM WITHOUT THE WRITTEN APPROVAL OF GRIZZLY INDUSTRIAL, INC.
#6158 PRINTED IN KOREA


MODEL H6016 CONTROLS

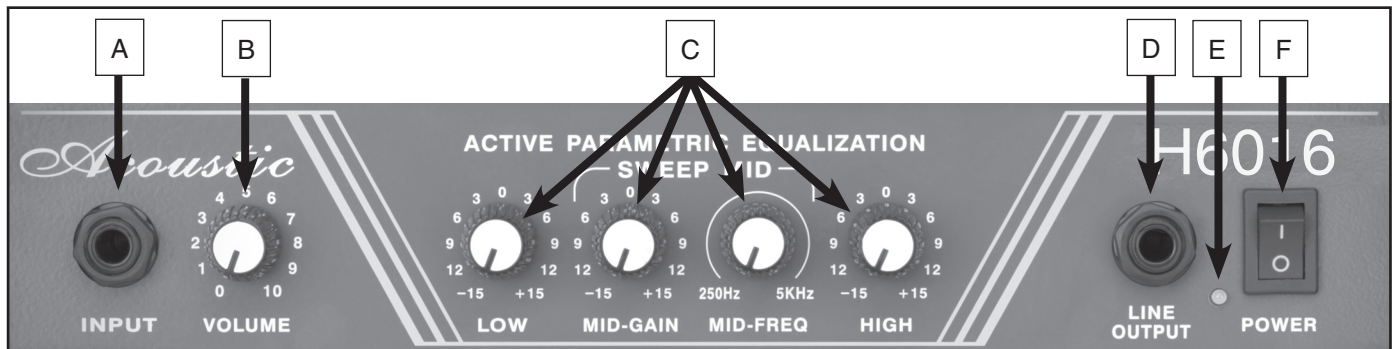

- A. **INPUT:** Connect your guitar here, using a shielded instrument cable with a 1/4" jack.
- B. **VOLUME:** This knob controls the overall volume of the amplifier.
- C. **ACTIVE PARAMETRIC EQUALIZATION:** This 3 band EQ features Low and High frequency shelving EQ filters along with a sweepable mid-frequency network that is adjustable to help reduce feedback. The midrange gain control, when turned toward the "-" direction, operates as a variable frequency notch filter.
- D. **LINE OUTPUT:** A line level output is provided for sending a signal from the pre-amp section to a mixing console for live performance or recording purposes.
- E. **POWER LED:** The power LED illuminates when the power is ON.
- F. **POWER SWITCH:** Turns power ON and OFF.

Caring For Your Amplifier

- DO NOT remove the grounding prong to fit the plug into a two-pronged outlet!
- To keep the amplifier working properly, DO NOT expose it to rain or moisture.
- DO NOT pull or lift the amplifier by the power cord.
- UNPLUG the amplifier before cleaning, and only clean with a damp cloth (no chemicals).

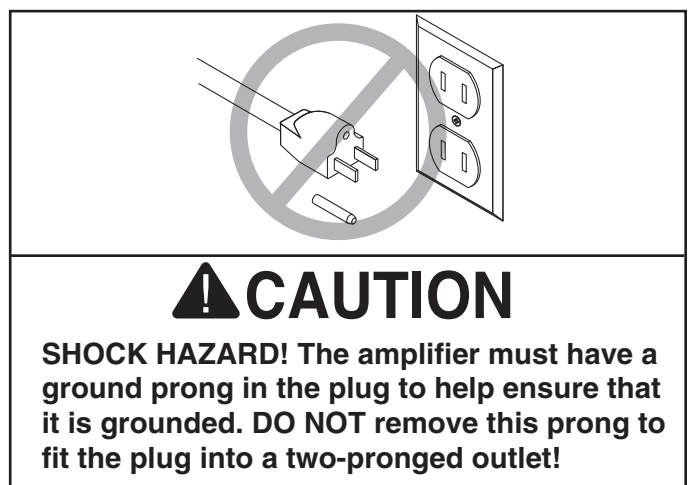

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>