

# GB-2000X Firewall Appliance

## Features

- Six 10/100 Ethernet ports
- ICSA-certified GNAT Box System Software
- Unrestricted concurrent users
- User authentication
- DHCP server
- DNS server
- Secure email proxy (SMTP)
- SNMP
- PPP / PPPoE / PPTP
- Local content list (LCL) filtering
- Secure remote management
- Stateful packet inspection
- Time-based filters
- Transparent NAT (network address translation )
- Two DB-9 serial console interfaces
- Two USB interfaces

## Optional Features

- VPN hardware acceleration
- Mail Sentinel™ Anti-Virus email filtering
- Mail Sentinel™ Anti-Spam email filtering
- Surf Sentinel® web content filtering
- H<sub>2</sub>A High Availability failover
- Additional mobile VPN client licenses
- Support contracts

## Feature Specifications

Feature	Standard	w/VPN acceleration
• Concurrent connections	128,000	128,000
• Mobile VPN client licenses	1	1
• PPP configurations	5	5
• IP aliases	300	300
• IP pass-through hosts	300	300
• Filters (each kind)	400	400
• Tunnels	300	300
• Address objects	600	600
• Static NAT maps	300	300
• Static routes	300	300
• Time groups	100	100
• Access control lists (ACL)	300	300
• Local content list (LCL) filters	250	250
• Protocols	255	255
• VPN security associations	250	600
• Mobile VPN users (max concurrent)	100	300

## Supported Software

- GTA Reporting Suite™ (firewall log reporting)
- GB-Commander® (firewall management)

## Expansion Options

- Two 10/100/1000 Ethernet ports
- Four 10/100 Ethernet ports
- Hardware VPN acceleration

## Hardware Specifications

<i>Dimensions</i>	16.87" x 14.17" x 1.73" (428.6mm x 360mm x 44 mm)
<i>Weight</i>	11.45 lbs (5.2 kg)

## Power Specifications

<i>Input Voltage</i>	<i>Input Frequency</i>
100-240 VAC	47-63 Hz

## Storage Specifications

<i>Temperature</i>	58 to 184° F (0° to 70° C)
<i>Relative Humidity</i>	5% to 95%, non-condensing

## Operational Specifications

<i>Temperature</i>	41° to 104° F (5° to 40° C)
<i>Relative Humidity</i>	20% to 90%, non-condensing

## Memory and CPU Specifications



<i>CPU</i>	2.0 GHz Intel Pentium 4
<i>Memory</i>	256 MB SDRAM
<i>Flash Memory</i>	512 MB Type 1 Compact Flash

\*Specifications subject to change without notice.



**Global  
Technology  
Associates, Inc.**

**Hardware Specification**

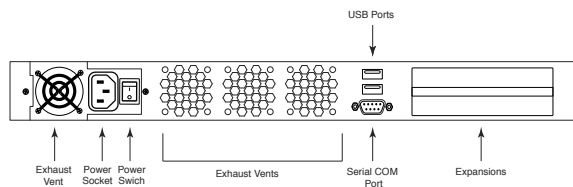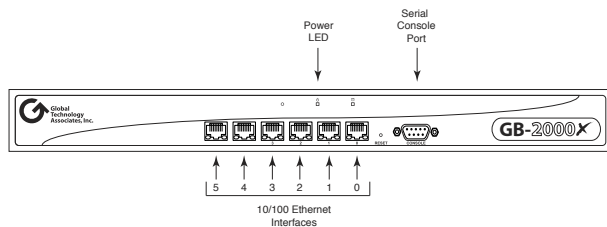

## Hardware Design

The GB-2000X chassis is a 1-RU unit designed to minimize heat buildup with two cooling fans. It has six high speed 10/100 Mbps Ethernet interfaces to ensure high performance and network design flexibility, one DB-9 serial interface to provide access for a serial console, one DB-9 serial (COM) interface for a dial-up modem/ISDN TA, and two USB interfaces. Flash memory stores and runs the pre-installed GNAT Box System Software. Power is supplied by a power cable. A reboot may be triggered using the "Reset" pin hole.

### Caution

At least 6" should be provided behind the system to allow efficient cooling. Inadequate clearance can cause the system to overheat.

### Warning

There are no user serviceable or upgradeable parts in the GB-2000X. Opening the unit will void the warranty on the system, and may cause injury.

## I/O Interface Specifications

- Six (6) 10/100 Mbps Ethernet 10Base-T network interfaces on UTP Cat. 3, 4 and 5, and fast Ethernet 100Base-TX network interfaces on UTP Cat. 5. NIC 0 is factory set to IP address 192.168.71.254 .
- Two (2) DB-9 (RS-232) serial interfaces  
The serial console / modem port should be set to 38,400 bps, 8 bit, 1 stop, no parity and flow control to hardware.
- Two (2) USB interfaces
- Two (2) PCI expansion slots

## LED Status Indicators

### Front Panel LEDs

<i>Power LED</i>	When the firewall is powered up, the green Power LED on the front panel will be lit.
<i>Disk LED</i>	The red LED will light when the Compact Flash disk is accessed.
<i>10/100 LED</i>	The green LED will remain unlit if a 10 Mbps connection is established; it will light if a 100 Mbps connection is established. Each 10/100 LED is located on the associated Ethernet connector.
<i>Link/Activity LED</i>	The green LED will light and remain solid when an Ethernet connection is established; it will blink when activity occurs over that connection. Each Link/Activity LED is located on the associated Ethernet connector.

© 2005 Global Technology Associates, Inc. sales@gta.com

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>