

Sound101

SPECIFICATIONS

Table Radio with Dock for iPod/Sirius-Ready/AM/FM


Etón has updated the retro glamour of radios past with swooping, curved lines and today's in-demand technology. This little radio packs a wallop, making it ideal for home or office use.



Also available in:



WHITE

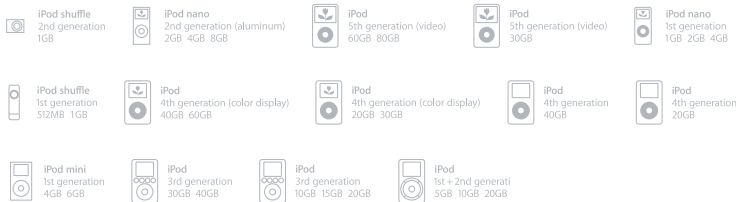

FEATURES

- AM frequency coverage: 530 - 1710 KHz / step 10 KHz
- FM frequency coverage: 87.50 - 108.00 MHz / 0.1 MHz
- Uses Sirius direct connect for home - provides text information on songs/music
- Memory preset station assignments: 20 AM and 20 FM for total of 40 presets
- Encoder volume control
- Manual scan tuning
- Auto station: locates and locks in on the strongest station
- Auto tune provides a programmed service list
- AM/FM tuner type and circuitry: a high-sensitivity digital Phased-Locked Loop Tuner (PLL) locks in the frequency and provides excellent AM/FM reception and selectivity
- LCD type: 128x64 dot-matrix, 88 Segment, 2.87" W x 2.01" H (73mm W x 51mm H module size)
- Viewing area: 2.68" W x 1.54" H (68mm W x 39mm H), gentle illumination (will not keep you awake), blue backlight, black characters, displays time, station, alarm, band and presets
- Clock functions: 12 hours format selectable, alarm (wake up to Radio or Buzzer), sleep timer (programmable minimum range 15 minutes and maximum range 60 minutes), snooze (mode duration: 5 minutes, 10 minutes, 15 minutes)
- Auxiliary inputs:
- 3.5mm Aux line-in for MP3/CD connection
- 3.5mm audio line-out
- Input for AC adapter (included), input for earphones (not included)
- External aerial connection socket
- Amplifier: single channel, earphone, AB
- Speaker type: the 3" full range, magnetically shielded, high-fidelity, front firing, mono speaker driver is capable of producing a wide range of frequencies and produces incredibly powerful, distortion-free, room filling sound
- RMS power output: 3 WRMS @ 10% THD, 2 WRMS @ 1% THD
- Frequency response range: 80Hz- 20KHz
- Base port
- Audio output: 5 Watt
- Unit power: 30 Watt
- FM antenna type: pigtail antenna, 360 degree swivel-rotary type
- AM antenna type: built-in loop
- Protection: rubber feet prevent scratching and movement
- Power source: AC adaptor (included); Input voltage: power supply, IN: 100-240V 50HZ, OUT: DC 15V/2A, UL approval
- Battery back-up: stores real time during a power failure (will not hold station presets and alarm settings during power failure), requires 4 AA batteries (not included)
- Dimensions: 8.27" x 4.53" x 5.1" (W x H x D) and 21,0 x 11,5 x 13,0 cm (W x H x D)
- Weight: 2.82 lbs. (3.96 lbs. with adapter) and 1,280 g (1,800 g with adapter)
- Accessories: owner's manual, AC adapter, infrared remote control, dock for iPod, AM loop antenna



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>