



**Connect Tech Inc.**  
*Industrial Strength Communications*

# USER MANUAL

## PCIe/104 (PCI/104-Express) to PCI Express Adapter *Top Stacking Model*



CTIM-00054 (0.01) - March 26, 2010

# Table of Contents

- Table of Contents .....2
- Copyright Notice .....3
- Trademark Acknowledgement .....3
- Revision History.....3
- Introduction .....4
- Features .....4
- 1. Block Diagram .....4
- 2. Hardware Installation .....5
- 3. Pinouts and Signal Interconnect .....6
- 4. PCI/104-Express SBC Compatibility .....8
- 5. Power Notes .....9
- 6. Product Errata.....9
- Limited Lifetime Warranty .....10
- Customer Support Overview .....10
- Contact Information .....10

## Copyright Notice

The information contained in this document is subject to change without notice. Connect Tech Inc. shall not be liable for errors contained herein or for incidental consequential damages in connection with the furnishing, performance, or use of this material. This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated to another language without the prior written consent of Connect Tech, Inc.

Copyright © 2010 by Connect Tech Inc.

## Trademark Acknowledgement

Connect Tech Inc. acknowledges all trademarks, registered trademarks and/or copyrights referred to in this document as the property of their respective owners.

Not listing all possible trademarks or copyright acknowledgments does not constitute a lack of acknowledgment to the rightful owners of the trademarks and copyrights mentioned in this document.

## Revision History

<b>Revision 0.00</b>	Original document
<b>Revision 0.01</b>	Updated images and compatibility content

## Introduction

Connect Tech's PCI/104-Express to PCI Express Adapter enables users to install any x1, x4, x8 or x16 lane PCI Express card in a PCI/104-Express stack.


This convenient adapter board enables the testing and development for standard PCI Express cards in the PCI/104-Express environment.

## Features

- PCI/Express x1, x4, x8, x16 Lane Card Compatible
- PCI/104-Express & PCIe/104 Compatible
- SBC Top Stacking Compatible

## 1. Block Diagram

Below is a high level view of the PCI/104-Express to PCI Express Adapter. Aside from the x1 and x16 lane switch the rest of the PCI express signals are direct connections to those of the PCI/104-Express signals. See [Table 1](#) in this manual for a full listing of pinouts and interconnections.

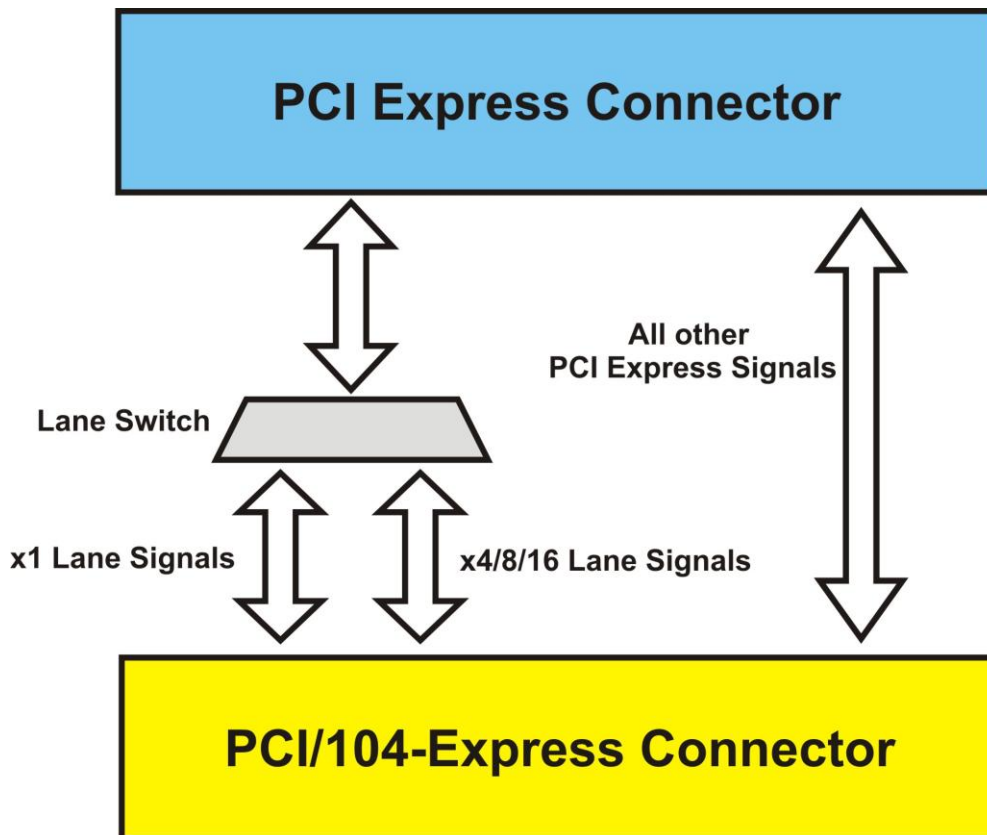

## 2. Hardware Installation

### PC104 Stand-Offs



When installing the ADG017 or ADG20 device into your PCI/104-Express SBC system, four proper stack heights (0.6") PC/104 standoffs must be used. If standoffs are not used, there is high likelihood that the PCI/104-Express connector can be damaged.

### Support Bracket Installation

All of the ADG017 and ADG020 products ship with a *Standard Height PCI Express Custom Support Bracket* that can be optionally installed to provide greater stability to the PCI Express device installed into your PCI/104-Express stack. Below are some instructions on how to properly install the bracket.



#### STEP #1

Insert bracket into alignment holes

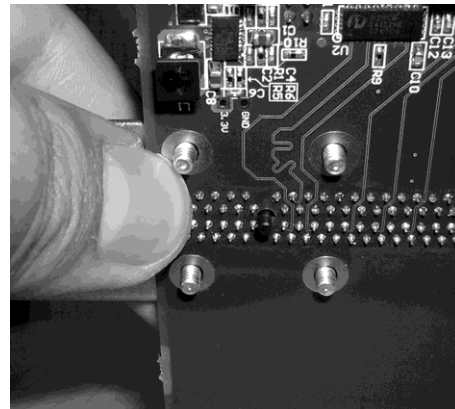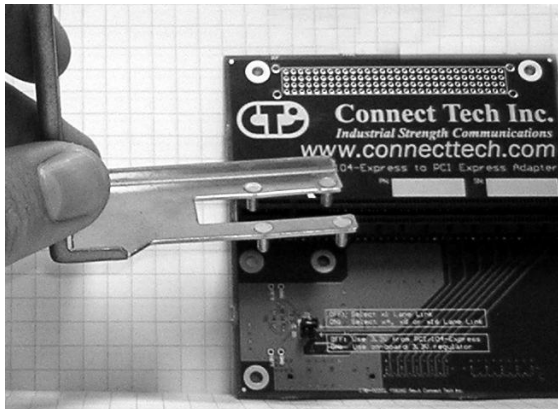

#### STEP #2

Install and tighten each of the 4 supplied nuts.

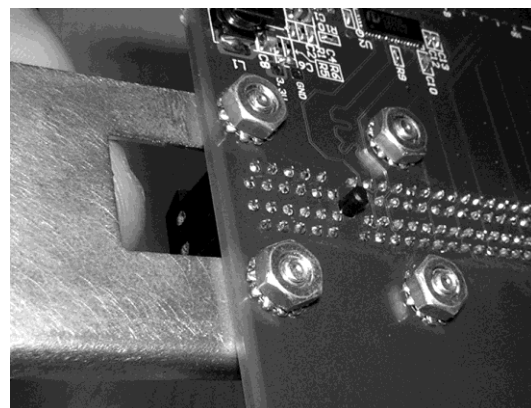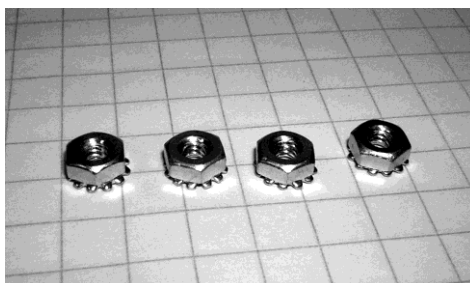

### 3. Pinouts and Signal Interconnect

Below is a listing of all signal interconnect between the PCI Express connector and the PCI/104-Express connector. Power, ground and presence detection signals have been removed from this list. Any other PCI/104-Express signals not listed, are no connects.

PCI Express Connector Pinout			PCI/104-Express Connector Pinout	
Connector Side	Pin No.	Pin Name	Pin No.	Pin Name
Side A	5	SMCLK	no connection	
Side A	6	SMDAT	no connection	
Side A	9	JTAG1	no connection	
Side A	11	WAKE#	53	Reserved / WAKE#
Side A	12	RSVD	no connection	
Side A	14	PETp0	12 OR 58	PEX1_OTp OR PEX16_OT(0)p
Side A	15	PETn0	14 OR 60	PEX1_OTn OR PEX16_OT(0)n
Side A	19	PETp1	64	PEX16_OT(1)p
Side A	20	PETn1	65	PEX16_OT(1)n
Side A	23	PETp2	70	PEX16_OT(2)p
Side A	24	PETn2	72	PEX16_OT(2)n
Side A	27	PETp3	76	PEX16_OT(3)p
Side A	28	PETn3	78	PEX16_OT(3)n
Side A	30	RSVD	no connection	
Side A	33	PETp4	82	PEX16_OT(4)p
Side A	34	PETn4	84	PEX16_OT(4)n
Side A	37	PETp5	88	PEX16_OT(5)p
Side A	38	PETn5	90	PEX16_OT(5)n
Side A	41	PETp6	94	PEX16_OT(6)p
Side A	42	PETn6	96	PEX16_OT(6)n
Side A	45	PETp7	100	PEX16_OT(7)p
Side A	46	PETn7	102	PEX16_OT(7)n
Side A	50	PETp8	57	PEX16_OT(8)p
Side A	51	PETn8	59	PEX16_OT(8)n
Side A	54	PETp9	63	PEX16_OT(9)p
Side A	55	PETn9	65	PEX16_OT(9)n
Side A	58	PETp10	69	PEX16_OT(10)p
Side A	59	PETn10	71	PEX16_OT(10)n
Side A	62	PETp11	75	PEX16_OT(11)p
Side A	63	PETn11	77	PEX16_OT(11)n
Side A	66	PETp12	81	PEX16_OT(12)p
Side A	67	PETn12	83	PEX16_OT(12)n
Side A	70	PETp13	87	PEX16_OT(13)p
Side A	71	PETn13	89	PEX16_OT(13)n
Side A	74	PETp14	93	PEX16_OT(14)p
Side A	75	PETn14	95	PEX16_OT(14)n
Side A	78	PETp15	99	PEX16_OT(15)p
Side A	79	PETn15	101	PEX16_OT(15)n
Side A	82	RSVD	no connection	

Side B	5	JTAG2	no connection	
Side B	6	JTAG3	no connection	
Side B	7	JTAG4	no connection	
Side B	8	JTAG5	no connection	
Side B	11	PERST#	2	PE_RST#
Side B	13	REFCLK+	36 OR 48	PEx1_0Clkp OR PEx16_x8_x4_Clkp
Side B	14	REFCLK-	38 OR 50	PEx1_0Clkn OR PEx16_x8_x4_Clkn
Side B	16	PERp0	24 OR 110	PEx1_0Rp OR PEx16_OR(0)p
Side B	17	PERn0	26 OR 112	PEx1_0Rn OR PEx16_OR(0)n
Side B	19	RSVD	no connection	
Side B	21	PERp1	116	PEx16_OR(1)p
Side B	22	PERn1	118	PEx16_OR(1)n
Side B	25	PERp2	122	PEx16_OR(2)p
Side B	26	PERn2	124	PEx16_OR(2)n
Side B	29	PERp3	128	PEx16_OR(3)p
Side B	30	PERn3	130	PEx16_OR(3)n
Side B	32	RSVD	no connection	
Side B	33	RSVD	no connection	
Side B	35	PERp4	134	PEx16_OR(4)p
Side B	36	PERn4	136	PEx16_OR(4)n
Side B	39	PERp5	140	PEx16_OR(5)p
Side B	40	PERn5	142	PEx16_OR(5)n
Side B	43	PERp6	146	PEx16_OR(6)p
Side B	44	PERn6	148	PEx16_OR(6)n
Side B	47	PERp7	152	PEx16_OR(7)p
Side B	48	PERn7	154	PEx16_OR(7)n
Side B	50	RSVD	no connection	
Side B	52	PERp8	109	PEx16_OR(8)p
Side B	53	PERn8	111	PEx16_OR(8)n
Side B	56	PERp9	115	PEx16_OR(9)p
Side B	57	PERn9	117	PEx16_OR(9)n
Side B	60	PERp10	121	PEx16_OR(10)p
Side B	61	PERn10	123	PEx16_OR(10)n
Side B	64	PERp11	127	PEx16_OR(11)p
Side B	65	PERn11	129	PEx16_OR(11)n
Side B	68	PERp12	133	PEx16_OR(12)p
Side B	69	PERn12	135	PEx16_OR(12)n
Side B	72	PERp13	139	PEx16_OR(13)p
Side B	73	PERn13	141	PEx16_OR(13)n
Side B	76	PERp14	145	PEx16_OR(14)p
Side B	77	PERn14	147	PEx16_OR(14)n
Side B	80	PERp15	151	PEx16_OR(15)p
Side B	81	PERn15	153	PEx16_OR(15)n

**Table 1 – PCI/104-Express to PCI/Express Pinout**

*All Pin Names have been referenced from the official specifications provided by [PCI-SIG](#) and the [PC/104 Consortium](#).*

## 4. PCI/104-Express SBC Compatibility

Connect Tech's PCI/104-Express to PCI Express Adapter (ADG017 and ADG020) boards enable users to install a x1, x4, x8 or x16 lane PCI Express card in a PCI/104-Express stack. This however can only be done when the adapter is used on the TOP of the stack. Certain CPU boards only populate the PCI/104-Express connector on the bottom side of the board, allowing for a stack down configuration only. In this case the Connect Tech adapter cannot be used. Below is a compatibility list of all PCI/104-Express CPU boards that are on the market at the time this document was created.

To view the most recent list, please refer to our online Knowledge Database Document which can be found here: <http://www.connecttech.com/KnowledgeDatabase/kdb316.htm>

### List of Compatible CPU Boards with the ADG017 and ADG020 Adapters

**AAEON Technology**  
EPIC-9457

**Digital-Logic / Kontron**  
MSM200XU

**LiPPERT Embedded Computers**  
Cool XpressRunner-GS45

**RTD Embedded Technologies**  
CMA22MVD  
CMA22MCS

**SBS Science and Technology**  
SCM8020

**Sundance Multiprocessor Technology**  
SMT100

### List of Incompatible CPU Boards with the ADG017 and ADG020 Adapters

**AAEON Technology**  
PFM-945C

**Digital-Logic / Kontron**  
MSM200XP  
MSM945P  
MSMG45P

**E.E.P.D.**  
PROFIVE M2

Please see [Connect Tech's ADG021 Adapter](#) for Bottom Stacking SBC's



## 5. Power Notes

Some PCI/104-Express SBC systems will not come with +3.3V power over the PCI/104-Express connector. If this is the case, enable jumper block J1 Position A\*\* (See errata) to enable the on board regulator to generate +3.3V (which is limited to 1.5A) for your PCI Express card. If the SBC you are using does provide +3.3V power, do not enable this jumper.

### PCI/104-Express Power Specifications

Voltage	Minimum Voltage (V)	Maximum Voltage (V)	Number of Pins	Current per Pin (A)	Total Current (A)	Total Power (W)
+3.3V	3.0	3.6	2	1.8	3.6	11.9
+5V	4.75	5.25	2 planes	8.4	16.8	84.0
+12V	11.40	12.60	1 plane	8.4	8.4	100.8
+5V_SB	4.75	5.25	2	1.8	3.6	18.0
GND	n/a	n/a	46	1.8	82.8	n/a

Please refer to your PCI/104-Express SBC manual for actual ratings used.

## 6. Product Errata

### ADG020 Limitations

- This product provides a single x1 lane PCI Express connection. PCI Express x4, x8 or x16 lane cards cannot be used. Please use the ADG017 board for this functionality.
- This product only provides +3.3V power to the PCI Express connector it does not provide any +12V. Please ensure your x1 PCI Express board does not use +12V. Please use the ADG017 for full +12V operation.

### Silkscreen Corrections \*\*

- The silkscreen label for Jumper block J1 is incorrect on all Rev. A PCBs.
- It should read:
 

Position A -	ON:	Use +3.3V regulator
	OFF:	Use +3.3V from PCI/104-Express
Position B -	ON:	Select x4, x8 or x16 Lane Link
	OFF:	Select x1 Lane Link

## Limited Lifetime Warranty

Connect Tech Inc. provides a Lifetime Warranty for all Connect Tech Inc. products. Should this product, in Connect Tech Inc.'s opinion, fail to be in good working order during the warranty period, Connect Tech Inc. will, at its option, repair or replace this product at no charge, provided that the product has not been subjected to abuse, misuse, accident, disaster or non Connect Tech Inc. authorized modification or repair.

You may obtain warranty service by delivering this product to an authorized Connect Tech Inc. business partner or to Connect Tech Inc. along with proof of purchase. Product returned to Connect Tech Inc. must be pre-authorized by Connect Tech Inc. with an RMA (Return Material Authorization) number marked on the outside of the package and sent prepaid, insured and packaged for safe shipment. Connect Tech Inc. will return this product by prepaid shipment service.

The Connect Tech Inc. lifetime warranty is defined as the serviceable life of the product. This is defined as the period during which all components are available. Should the product prove to be irreparable, Connect Tech Inc. reserves the right to substitute an equivalent product if available or to retract lifetime warranty if no replacement is available.

The above warranty is the only warranty authorized by Connect Tech Inc. Under no circumstances will Connect Tech Inc. be liable in any way for any damages, including any lost profits, lost savings or other incidental or consequential damages arising out of the use of, or inability to use, such product.

## Customer Support Overview

If you experience difficulties after reading the manual and/or using the product, contact the Connect Tech reseller from which you purchased the product. In most cases the reseller can help you with product installation and difficulties.

In the event that the reseller is unable to resolve your problem, our highly qualified support staff can assist you. Our online Support Center is available 24 hours a day, seven days a week on our website at: [www.connecttech.com/sub/support/support.asp](http://www.connecttech.com/sub/support/support.asp). Please go to the [Download Zone](#) or the [Knowledge Database](#) for product manuals, installation guides, device driver software and technical tips. Submit your questions to our technical support engineers at [support@connecttech.com](mailto:support@connecttech.com). Our technical support is always free.

## Contact Information

### Telephone/Facsimile

Technical Support representatives are ready to answer your call Monday through Friday, from 8:30 a.m. to 5:00 p.m. Eastern Standard Time. Our numbers for calls are:  
Toll: 800-426-8979 (North America only) | Tel: 519-836-1291 | Fax: 519-836-4878 (online 24 hours)

### Email/Internet

You may contact us through the Internet. Our email and URL addresses are:  
[sales@connecttech.com](mailto:sales@connecttech.com) | [support@connecttech.com](mailto:support@connecttech.com) | [www.connecttech.com](http://www.connecttech.com)

### Mail/Courier

Connect Tech Inc.  
42 Arrow Road  
Guelph, Ontario, N1K 1S6, Canada

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>